

(12)

(21) **2 064 300**

(51) Int. Cl. 5: **D06Q 1/12, B32B 3/14**

(22) **27.03.1992**

(30) **07/676,377 US 28.03.1991**

(73)

HIGH VOLTAGE GRAPHICS, INC.
1520 Washington Avenue St. Louis,
MO 63103 XX (US).

(72)

Abrams, Louis B. (US).

(74)


SMART & BIGGAR

(54) **GARNITURES MATELASSEES**

(54) **TRANSFERS**

(57)

A combination flock and other material transfer. The flock has an open interior section. The other material, such as twill, is die cut greater than the opening of the interior section of the flock but less than the outside dimensions of the flock design. The unit is applied to a garment with a hot melt adhesive which seals the flock to the twill and the edges of the flock and the twill to the garment.

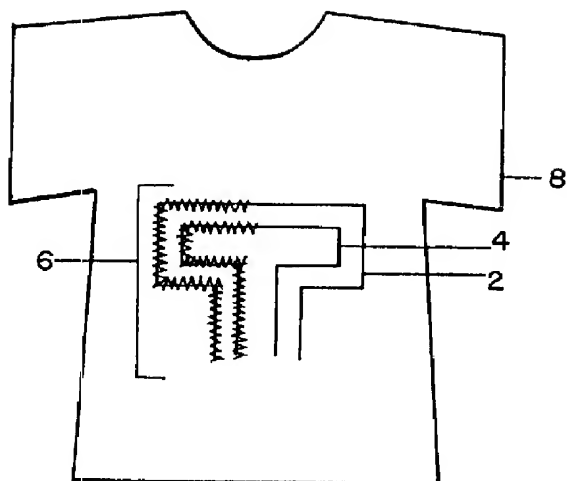



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2064300 C 2002/06/11

(11)(21) **2 064 300**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) **Date de dépôt/Filing Date:** 1992/03/27

(41) **Mise à la disp. pub./Open to Public Insp.:** 1992/09/29

(45) **Date de délivrance/Issue Date:** 2002/06/11

(30) **Priorité/Priority:** 1991/03/28 (07/676,377) US

(51) **Cl.Int.⁵/Int.Cl.⁵** D06Q 1/12, B32B 3/14


(72) **Inventeur/Inventor:**
Abrams, Louis B., US

(73) **Propriétaire/Owner:**
HIGH VOLTAGE GRAPHICS, INC., US

(74) **Agent:** SMART & BIGGAR

(54) **Titre :** GARNITURES MATELASSEES

(54) **Title:** TRANSFERS

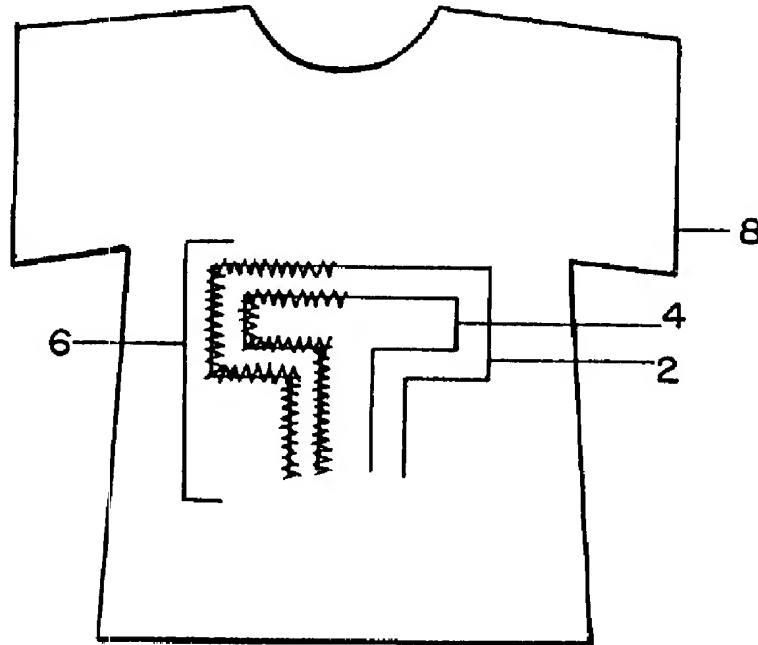

(57) **Abrégé/Abstract:**

A combination flock and other material transfer. The flock has an open interior section. The other material, such as twill, is die cut greater than the opening of the interior section of the flock but less than the outside dimensions of the flock design. The unit is applied to a garment with a hot melt adhesive which seals the flock to the twill and the edges of the flock and the twill to the garment.

Canada

<http://opic.gc.ca> • Ottawa-Hull K1A 0C9 • <http://cipo.gc.ca>

OPIC • CIPQ 191

OPIC



CIPO

TRANSFERSAbstract

A combination flock and other material transfer. The flock has an open interior section. The other material, such as twill, is die cut greater than the opening of the interior section of the flock but less than the outside dimensions of the flock design. The unit is applied to a garment with a hot melt adhesive which seals the flock to the twill and the edges of the flock and the twill to the garment.

TRANSFERS

BACKGROUND OF THE INVENTION

I. FIELD OF THE INVENTION

The invention generally relates to a method of manufacturing combination flock transfers. Specifically, the invention is directed to transfers that are substitutable and/or enhancements for conventional sewn twill decorative designs. More particularly, the present invention is directed to a product and method that combines twill or other material with flock to produce a decorative product that can be used as a substitute for the conventional sewn-on product.

II. DESCRIPTION OF THE PRIOR ART

Sewn twill is usually employed as a means of team lettering athletic uniforms and accessories. It can be very expensive to use sewn twill in decorative applications due to the cost of applying the letters or design to the garment. Each letter must be cut, placed in position and sewn to the garment which is very time consuming and thus expensive. Most importantly, it must be sewn at the edges to avoid fraying during washing.

A sewn multicolor twill design comprises at least two members. As shown in Figure 1, the sewn twill unit can have an outer member 2 and an inner member 4. Each of the members can be precisely die cut so that the outer member 2 forms an outline for the inner member 4. The inner member 4 is positioned over the outer member 2 and temporarily heat sealed together (tacked) to maintain their alignment.

The letters 6 are then assembled on the garment 8 and temporarily heat sealed (tacked) to maintain their position. The edge of inner member 4 is then hand sewn to the outer member 2. This is followed by the sewing of the edge of outer member 2 to the garment 8. This process must be performed on each letter individually. Instead of sewing

*66605-163

the letter it is possible to use an adhesive to affix the letter to the garment.

As is apparent from the preceding the sewn twill process has a number of limitations which make it very
5 expensive and difficult to employ. The process is very labor intensive which makes it more expensive than other forms of lettering. Not only is it labor intensive but the process requires highly skilled sewers to sew the letters to the garments. Thus, the cost of garments utilizing sewn twill can
10 be prohibitively high which can limit the use of sewn twill in moderately priced goods.

What is needed is an alternative to sewn twill which provides a similar appearance without being expensive to either produce or apply to a garment. It is important that the
15 alternative be easy to apply without the necessity of highly skilled sewers but which can be applied in factories or stores with general technicians using conventional transfer heat presses. It is these objects which the present invention fulfills.

20 SUMMARY OF THE INVENTION

The present invention provides a combination decorative transfer having:

a flock component with at least one open interior section, and

25 a second material which is dimensionally greater than at least one of the flock's open interior sections and less than the overall dimension of the flock component,

wherein the flock component is bonded through an adhesive to the second material in such a manner that the

66605-163

second material is visible through the open interior section of the flock component, and

wherein the second material has a hot melt adhesive coated on its exterior surface, so that the combination
5 decorative transfer may be affixed to a surface of an article by applying heat.

Preferably, the second material is twill; and the flock is greater than 0.5 mm in length.

Also, the present invention provides, a method of
10 making a combination decorative transfer having a flock component and a second material component, which comprises:

a) forming a flock component having at least one open interior section; and

b) bonding through an adhesive a second material to
15 the flock component so that the second material is visible through the open interior section, wherein the second material is dimensionally greater than the flock's open interior section and less than the overall dimension of the flock,

wherein the second material has a hot melt adhesive
20 coated on its exterior surface, so that the combination decorative transfer may be affixed to a surface of an article by applying heat.

Further, the present invention provides a method of making a decorative transfer which comprises:

25 a) flocking a design on to a paper substrate having a release adhesive, wherein the flock is at least 0.5 mm in length and the design has an open inner surface area;

66605-163

b) applying a binder and hot melt adhesive to the flock design;

c) applying a hot melt adhesive to a second paper substrate coated with a release adhesive;

5 d) bonding a twill sheet to the hot melt layer which has been applied to the second paper substrate;

e) die cutting the twill so that it is smaller than the outside dimensions of the flock but greater than the open inner surface area in the flock; and

10 f) bonding the twill to the hot melt layer which is on the flock to form a transfer.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates the application of a twill decorative product to a garment.

15 Figure 2 is the transfer according to a preferred embodiment of the invention.

Figure 3 is a conventional flock transfer.

Figure 4 illustrates the preferred method of making a flock transfer according to the present invention.

20 DESCRIPTION OF THE PREFERRED EMBODIMENTS

The manufacture of decorative flock transfers is well known. These products and their method of manufacture are described in the following United States Patents: 3,793,050; 4,142,929; 4,292,100; and 4,810,549.

25 As shown in Figure 2, the present invention departs from conventional flock transfer technology to produce a sewn twill substitute. The first step of the invention is to make

'66605-163

an outline of each letter 100 using conventional flock transfer technology. A sheet of twill 102 is coated with a hot melt adhesive 106. The twill 102 and hot melt 106 is attached to a paper liner 104 with an adhesive. This step is optional.

5 The twill 102 is then die cut slightly smaller than the flock 100 so that the flock transfer 100 overlays the edges of the twill 102. The excess twill is "weeded out". The twill and the flock are placed together and heated for several seconds under pressure at a temperature of approximately 300-
10 350 degrees F. The paper liner 104 may then be pulled off the unit. The unit can be applied to the garment 104 in the same manner as any other heat seal applique or transfer.

In summary, the steps for making the transfers of the invention involve making the flock transfer which comprise:

15 1. flocking a design on to a paper substrate having a release adhesive, the design having an open inner surface area; and

 2. applying a binder and hot melt adhesive to the flock design.

The twill or decorative portion of the transfer is made using the following steps:

- a) applying a hot melt adhesive to a paper substrate coated with a release adhesive;
- b) with the use of heat bonding the twill to the hot melt layer;
- c) die cutting the twill so that it is smaller than the outside dimensions of the flock; and
- d) weeding out the excess twill.

The two components are then combined in the following steps:

1. the release paper is removed from the twill side exposing the hot melt adhesive;
2. the transfer is placed on the garment with the hot melt of the twill component and the hot melt of the edges of the flock component adjacent to the garment; and
3. heat is applied which activates the hot melt adhesive to activate the adhesives and thus bind the transfer to garment; and
4. the release sheet protecting the flock layer is then removed.

Flocking methodology is well known. The method of forming the flock component, the twill component or their application to a garment is not critical per se. It is the combination which forms the basis of the invention.

The advantage to using a combination flock and twill is that the flock functions to seal the edges of the twill. Thus, sewing is unnecessary in the present invention. The guide edges of the paper are used to align the twill and flock sheets. No special expertise is required to apply the transfer to the garment. It is also feasible to bind the twill to the flock and the transfer to the garment in one step instead of two as previously described.

'66605-163

The flock/twill transfer gives substantially the same appearance as the traditional sewn twill lettering at only a fraction of the cost. It provides a more dimensional, interesting combination of two different textures. Materials
5 other than twill can be used in the performing of the invention i.e. knits or plastics etc. Most importantly, unlike conventional twill lettering where one letter is placed on a garment at a time, utilizing the method of the invention the entire name can be placed on a garment with a single transfer
10 which avoids alignment problems.

As shown in Figure 3, the flock transfer of the present invention comprises a release sheet 204, such as paper or polyester film, to which a conventional flock transfer release adhesive 206, usually acrylic, and/or urethane is
15 applied. A preferred release adhesive is commercially available as LR 100, manufactured by Societe D'Enduction et de Flockage. The release sheet, however, may be any material which can be suitably used with the adhesive which should be selected to effect temporary adhesion of the flock fibers.
20 Although paper, such as dimensionally stable, processed paper, and plastic films are preferred, resin sheets and metal foils may also be employed. Depending on the desired effect and the sheet materials employed, the release sheet may be transparent, translucent or opaque, but is preferably transparent.

25 The release adhesive 206 may be applied in the reverse of a desired pattern, that is, a pattern which corresponds to the overall image which is to be flocked. Preferably, however, the release adhesive may be applied without regard to the overall design desired, for example by
30 applying the released adhesive with rollers or spraying the release sheet with a coating of the release adhesive, particularly when the batches of flock having different fiber lengths and/or precolored flocks are sequentially applied to

66605-163

the adhesives, as discussed in more detail hereinbelow. The release adhesive may be applied in the form of a solution or emulsion, such as a resin or a copolymer, such as polyvinyl acetate, polyvinyl alcohol, polyvinyl chloride, polyvinyl butyral, acrylic resin, polyurethane, polyester, polyamides, cellulose derivatives, rubber derivatives, starch, casein, dextrin, gum arabic, carboxymethyl cellulose, resin, or compositions containing two or more of these ingredients.

The flock 208 is preferably composed of precolored fibers that are greater than .5 mm in length, which may be referred to herein as flock fibers. The flock may be rayon, and other types of conductive material, such as nylon, polyamide, polyester and similar synthetic fibers, with nylon being preferred, and is applied to the adhesive 206, such as activated adhesive, by electrostatic processes, spraying, or by gravity, such as sprinkling or vibrating the flock onto the surface of the base sheet provided with the release adhesive, with electrostatic flocking being preferred.

In general, conventional electrostatic flocking utilizes a field of static electricity to orient fibers and promote their perpendicular alignment. This technique has been found to be particularly suitable for flocking with longer fibers in accordance with the present invention. In a method of electrodeposition used for purposes of the present invention an adhesive-coated release sheet is passed between the potentials of a high voltage electrostatic field. An electrode is utilized to give the flock a charge. The charged fibers become aligned with the electrical field lines of force. The ground potential is formed by the release sheet and/or the grounded parts of the machine. The flock is thus attracted to the adhesive where it becomes embedded. Most fibers adhering to the adhesive-coated surface are perpendicular to it, thus resulting in a dense pile finish. Inasmuch as it is the nature

66605-163

of the field to align the fibers perpendicular to a surface, electrostatic flocking permits substantially any shaped object to be flocked, may be used for a variety of objects.

More specifically, referred to Figure 4, flock fibers
5 are dosed or dispensed from a hopper or box 220 by being physically pushed through a dispensing screen 221, which is preferably made of metallic mesh, by means of a rotating dosing brush 222, down into the electrostatic field and through barrier. The barrier has an open section corresponding to a
10 predetermined pattern of flock to be passed therethrough. The barrier 229, which is preferably a mesh screen, may also be referred to herein as the image screen. As shown, the image screen is located between the dispensing screen 221 of the hopper and substrate material 227. Preferably, the image
15 screen is positioned closely adjacent the substrate material and more preferably is spaced from the substrate material by a distance which is about equal to the length of flock being applied to the substrate, and more preferably by a distance of about 110% of the length of the flock. In the most preferred
20 instance, the binding adhesive is preferably applied to the substrate material to a thickness equal to less than about 10% of the length of the flock. The metallic dosing screen is connected to a high voltage source and is itself the high voltage electrode 223 giving the flock fibers a charge, either
25 positive or negative. The charged fibers are then attracted to the counter potential, i.e., the screen and adhesive 224 below the screen. Fibers 225 are propelled by electrostatic counter potential attraction toward the grounded electrode, and they either then contact the screen and reverse polarity and are
30 then propelled again towards the electrode screen or, if they are propelled into the adhesive 224, they become permanently lodged in it and remain there, eventually forming the flock coating on the adhesive coated fabric or substrate material

66605-163

227. In accordance with the present invention, the flock becomes polarized, taking on both the charge of the electrode on one end and the counter potential charge on the other so it is no longer oscillating in the electrostatic field.

5 The resultant flock has an electrically conductive chemical finish coating to enable it to become charged as well as to enable it to continually change charges back and forth from positive to negative thousands of times per minute. Thus, the flock oscillates back and forth between the electrode,
10 i.e., the dosing screen, and the ground, i.e., image screen until it eventually finds a permanent location in the adhesive. The amount of flock therefore dosed into the electrostatic field is adjusted to be roughly equal to the amount which is taken out of the field or used by the printed adhesive, to
15 avoid overdosing or crowding of the fibers in the field which may block the image screen or simply waste the flock. Up to 100,000 volts is used with very low amps, e.g., a maximum of 2000 microamps with about 40,000 volts being preferred. For textile applications, 1 millimeter nylon flock with 3.3 Dtex
20 (diameter) is preferred.

Referring back to Figs. 3 and 4, the flock 208 of the flock covered release sheet 204 is then coated with a binder adhesive 210, such as a water based acrylic, which binds the flock into a unit and is a barrier for the hot melt.
25 Preferably the binding adhesive is applied in the form of a solution or emulsion. The binder adhesive preferably contains a resin, such as polyvinyl chloride, polyvinyl acetate, polyurethane, polyester, polyamide, and acrylic resin, and preferably the previously mentioned water based acrylic. A
30 preferred binder adhesive is commercially available as Tubitrans* Bond manufactured by Chemische Fabrik Tubitrans R.

*Trade-mark

66605-163

Beitlich GmbH & Co. Tubitrans* Bond is an acrylic dispersion which is cross-linkable at higher temperatures in the form of a high viscosity, white paste. The acrylic dispersion has a viscosity of cp. 4.5-4.6 measured with Contraves* Viscometer, type Epprecht, Instrument and a pH of about 7-8. This acrylic resin dispersion may be mixed with Tubitrans* Fix 2 and optionally further with a colormatch dyestuff. A preferred binder adhesive, therefore, would be 100 parts Tubitrans* Bond, 8 parts Tubitrans* Fix 2, and 0-3 parts colormatch dyestuff. The binder adhesive 210 may contain additional or supplemental adhesives, such as a hot melt adhesive, usually a granular polyester or nylon, for binding the transfer to a substrate.

Alternatively, the hot melt adhesive 212, may form a separate layer. The use of separate hot melt layers is preferable. In addition, other heat sensitive adhesives, such as polyvinyl chloride, thermoplastic acrylic resin, polyethylene, polyamide, polyurethane, paraffin and rubber derivative may be used for this purpose, with polyurethane being preferred.

In accordance with the present invention the transfers may be applied to a surface area of any type of article, but preferably a garment or piece of wearing apparel, to which it is desired to affix or imprint a word, design, logo, emblem or other sign or symbol, particularly shirts, jerseys, jackets, pants, shorts and caps, such as those designed to be worn during athletic activities, e.g., U.S. baseball uniforms. Also instead of twill, polyvinyl chloride may be used as the combination decorative material. Under such circumstances radio frequency energy instead of heat is preferable as a means of binding.

*Trade-mark

66605-163

CLAIMS:

1. A combination decorative transfer having:

 a flock component with at least one open interior
section, and

5 a second material which is dimensionally greater than
at least one of the flock's open interior sections and less
than the overall dimension of the flock component,

 wherein the flock component is bonded through an
adhesive to the second material in such a manner that the
10 second material is visible through the open interior section of
the flock component, and

 wherein the second material has a hot melt adhesive
coated on its exterior surface, so that the combination
decorative transfer may be affixed to a surface of an article
15 by applying heat.
2. The transfer of claim 1, wherein the second material
is twill.
3. The transfer of claim 2, wherein the flock is greater
than 0.5 mm in length.
- 20 4. The transfer of claim 2 or 3 wherein the flock is
bonded at edges thereof to a garment.
5. The transfer of claim 3, wherein the twill is bonded
to the flock.
6. The transfer of claim 4, wherein the twill is also
25 bonded to the garment.

66605-163

7. The transfer of claim 1 wherein the second material is polyvinyl chloride and the flock is at least 0.5 mm in length.

8. The transfer of any one of claims 1 to 7, wherein the
5 transfer forms letters or numbers.

9. A method of making a combination decorative transfer having a flock component and a second material component, which comprises:

a) forming a flock component having at least one open
10 interior section; and

b) bonding through an adhesive a second material to the flock component so that the second material is visible through the open interior section, wherein the second material is dimensionally greater than the flock's open interior section
15 and less than the overall dimension of the flock,

wherein the second material has a hot melt adhesive coated on its exterior surface, so that the combination decorative transfer may be affixed to a surface of an article by applying heat.

20 10. The method of claim 9, wherein the second material is twill.

11. The method of claim 10, wherein the flock is at least 0.5 mm in length.

12. The method of any one of claims 10 or 11, which
25 further comprises bonding the decorative transfer to a garment.

13. The method of claim 12 wherein edges of the flock are bonded to the garment.

66605-163

14. The method of claim 12 or 13, wherein the twill also bonds to the garment.

15. The method of claim 12, wherein the transfer forms letters or numbers.

5 16. The method of claim 12, wherein the twill is bonded to the flock and the transfer is bonded to the garment in one step utilizing heat.

17. The method of claim 9, wherein the second material is polyvinyl chloride.

10 18. A method of making a decorative transfer which comprises:

a) flocking a design on to a paper substrate having a release adhesive, wherein the flock is at least 0.5 mm in length and the design has an open inner surface area;

15 b) applying a binder and hot melt adhesive to the flock design;

c) applying a hot melt adhesive to a second paper substrate coated with a release adhesive;

20 d) bonding a twill sheet to the hot melt layer which has been applied to the second paper substrate;

e) die cutting the twill so that it is smaller than the outside dimensions of the flock but greater than the open inner surface area in the flock; and

25 f) bonding the twill to the hot melt layer which is on the flock to form a transfer.

19. The method of claim 18, which further comprises applying the transfer to a garment.

66605-163

20. The method of claim 19, wherein when the twill is bonded to the flock, the transfer is simultaneously bonded to the garment.

21. A combination decorative transfer that is a laminate
5 comprising:

(A) a flock sheet component having a design with at least one open interior surface area, wherein the flock sheet component comprises a flock layer of fibers, a layer of a binder adhesive to which the fibers of the flock layer are
10 partly embedded and a layer of a hot melt adhesive in this order while the layers of the binder adhesive and the hot melt adhesive may be combined into a single layer, and

(B) a second material sheet component which is dimensionally greater than the open interior surface area of
15 the flock sheet component and less than the overall dimension of the flock sheet component,

wherein the flock sheet component is positioned over the second material sheet component in such a manner that the second material sheet component is visible through the open
20 interior surface area of the flock sheet component and that the hot melt adhesive at edges of the flock sheet component is available for affixing to a surface of an article, and

wherein the second material sheet component comprises a sheet of the second material and a layer of a hot melt
25 adhesive coated on an exterior surface of the sheet of the second material so that the combination decorative transfer may be affixed to the surface of the article through the hot melt adhesives of the second material sheet component and the flock

66605-163

sheet component.

22. The transfer of claim 21, wherein the sheet of the second material is twill.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS

2064300

FIG. 1


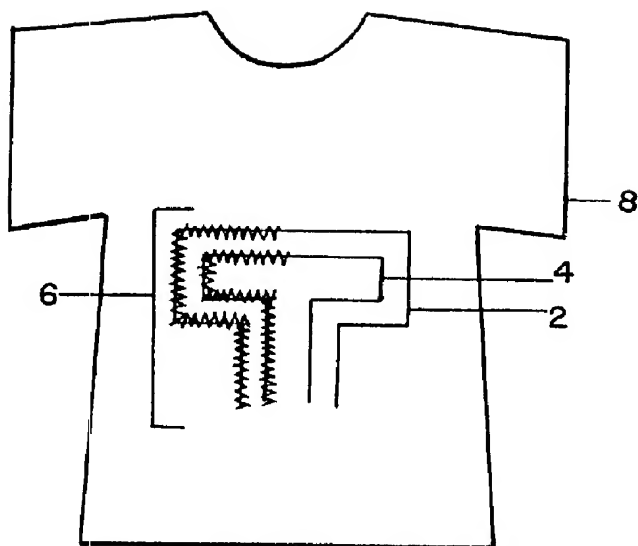


FIG. 2

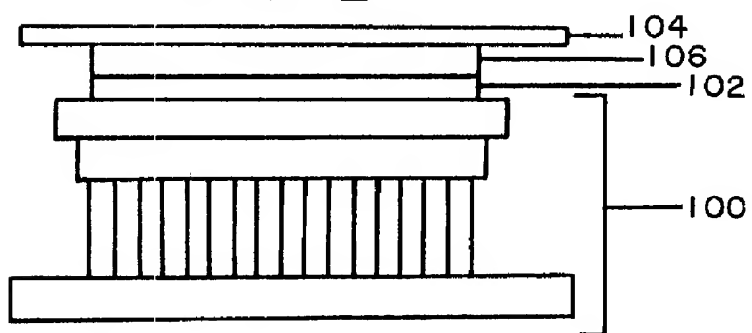

Patent Agents
Smart & Biggar

2064300

FIG. 3


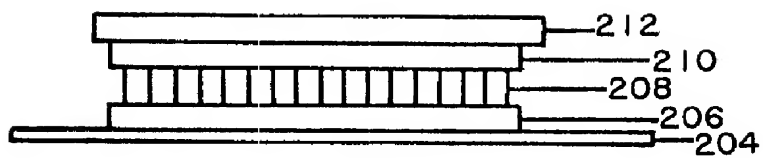


FIG. 4

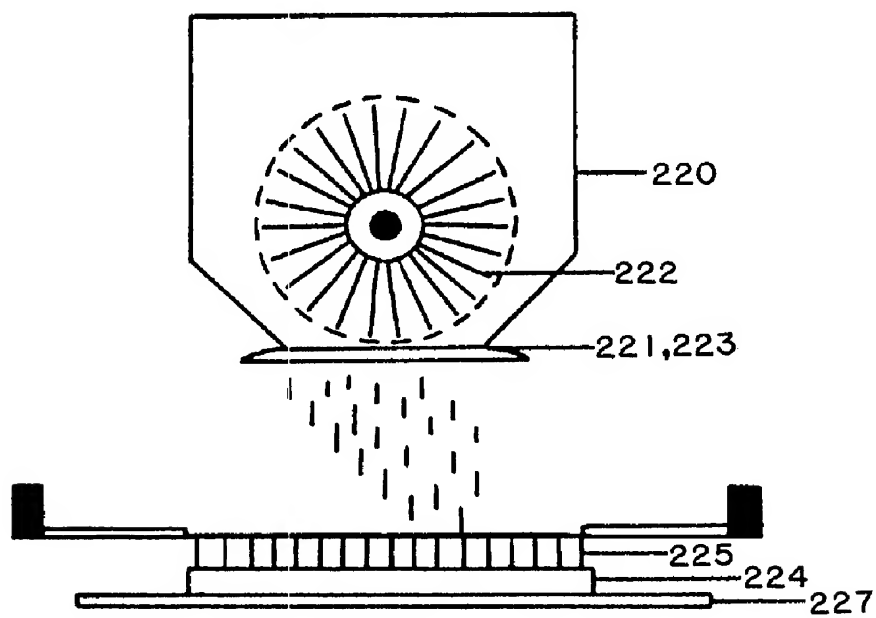

*Patent Agents
Smart & Bigger*